
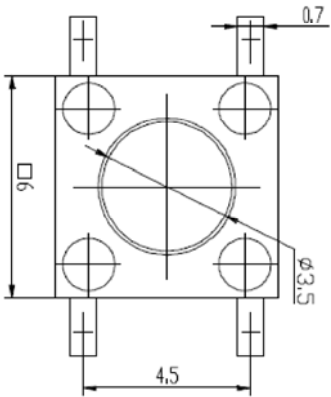

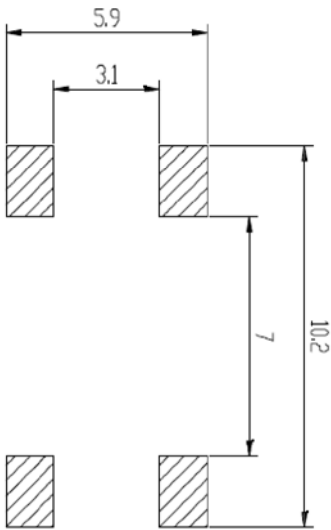
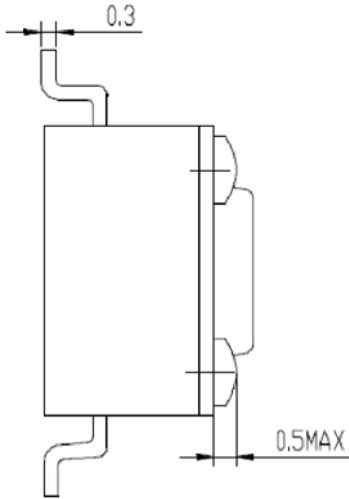


| REV. | ECN NO. | LOCATIONS. | DESCRIPTION | DATE | CHANGER |
|------|---------|------------|-------------|------|---------|
| | | | | | |

1. Rating : DC 12V. 50mA
2. Travel : 0.25±0.1mm
3. Contact Resistance: 50m Ω MAX
4. Operating force:160±50gf & 250±50gf
5. Generan Tolerance:±0.2mm

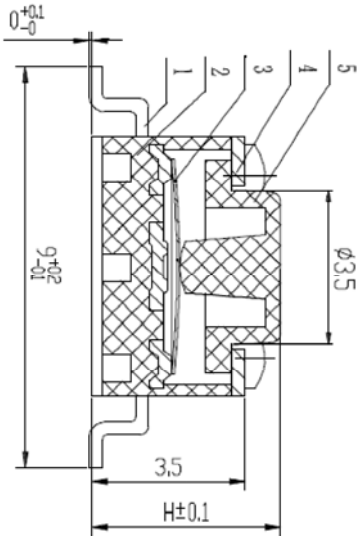

| PART NO | H(MM) |
|-------------|-------|
| RS6647W-LF | 4.3 |
| RS6647WA-LF | 5.0 |
| RS6647WB-LF | 7.0 |
| RS6647WC-LF | 8.0 |
| RS6647WD-LF | 9.5 |
| RS6647WI-LF | 6.0 |
| RS6647WJ-LF | 9.0 |

| NO. | NAME | MATERIAL | NATIONALITY | QTY. | FINISHING |
|-----|----------|-----------------|-------------|------|-----------------------------|
| 1 | TERMINAL | Brass | China | 1 | Silver plating |
| 2 | CASE | FR52 | USA | 1 | Black |
| 3 | CONTACT | Phosphor bronze | Korea | 1 | Contact side silver plating |
| 4 | COVER | SPCC-SD | China | 1 | CuSn plating |
| 5 | STEM | FR52 | USA | 1 | |

| GENERAL TOLERANCE | | TITLE: TACT SWITCH |
|-------------------|-------|---------------------------|
| X± | X±1° | |
| X± 0.30 | X± | |
| .XX± 0.20 | .XX± | |
| XXX± 0.10 | .XXX± | |

| CUSTOMER DRAWING | | PART NO. RS6647W-LF SERIES |
|------------------|----------|-------------------------------|
| APPROVED | CHECKED: | |
| Paul | Paul | |
| DRAWN: | sunny | |
| mm | mm | |

鉅創科技有限公司

TRONTEK TECHNOLOGY CO., LTD.

TACT SWITCH

20121215

| SCALE: | SHEET: |
|--------|--------|
| 4:1 | 1 / 1 |