

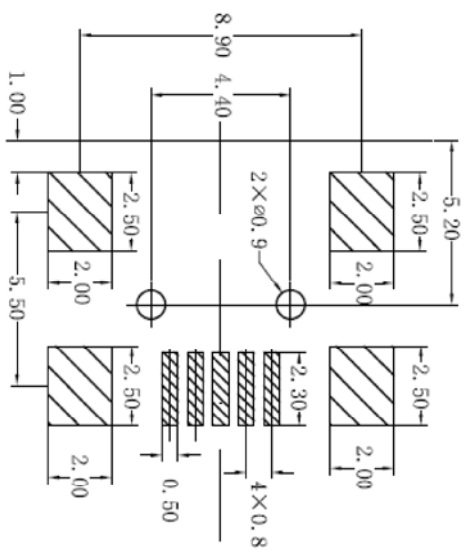
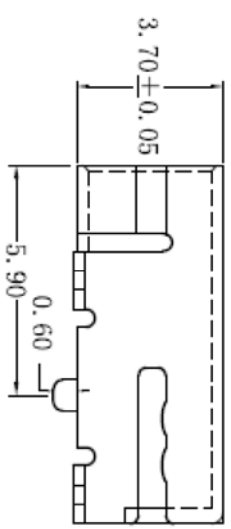


REV.	ECN NO.	LOCATIONS	DESCRIPTION	DATE	CHANGER

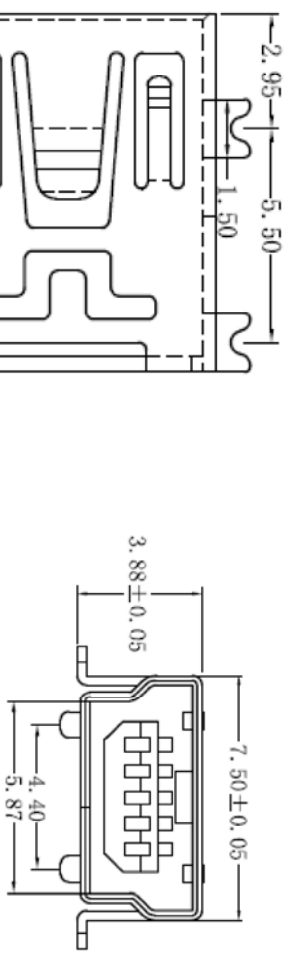

RECOMMENDED PCB LAYOUT

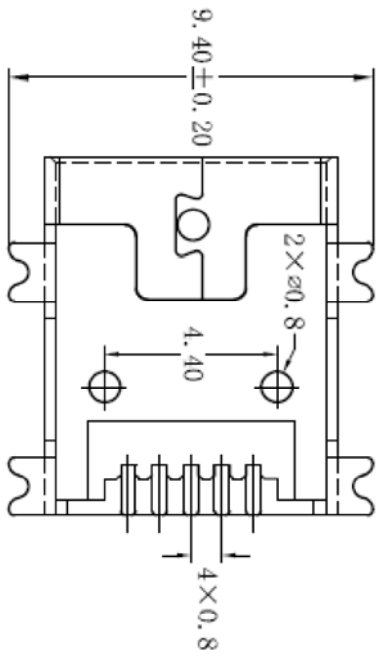

规格说明: Specifications:

电气特性: Electrical:

- 1. 额定电流: Current Rating
1.0A/contact terminal
- 2. 额定电压: Voltage Rating
30V DC
- 3. 接触阻抗: Contact Resistance
50 milliohms MAX
- 4. 耐电压: Dielectric Withstanding Voltage:
300 V AC AT Sea Level
- 5. 绝缘阻抗: Insulation Resistance:
100MEGA ohms MIN

物理性能: Mechanical:

- 1. 插拔力: Connector Mate and Umate Force
Mate force: 3.0kgf (MAX)
Umate force: 0.7kgf (MIN)
- 2. 端子保持力: Terminal Retention
0.5kgf (MIN)

原材料: Material:

- 1. 塑胶: Housing:
Hing Temperature Thermoplastics,
U1 94V-0 LCP Black
- 2. 端子: Contact: Copper Alloy C2680/C5191
- 3. 外壳: Shell: Copper Alloy C2680

电镀: Finish:

- 1. 端子: Contact: Plated Gold in Mating Area;
Tin On Solder Tails
- 2. 外壳: Shell:
Nickel Plating

鉅創科技有限公司

TRONTEK TECHNOLOGY CO., LTD.

TITLE: MINI USB 5F SMT (B type 0.5T / 0.6)

GENERAL TOLERANCE		PART NO: TMU-02-04-A-36	DWG NO: 20120613
X±0.30	X*± 3°		
X±0.25	X*±		
XX±0.20	XX*±		
XXX±0.05	XXX*±	CUSTOMER DRAWING	

APPROVED	CHECKED:	DRAWN:	SCALE:	SHEET:
Tony	Tony	sunny	1:1	1 / 1
			mm	B