
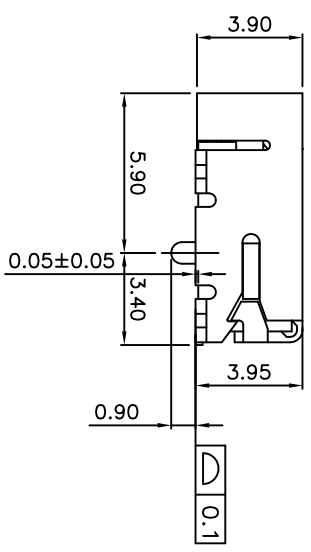

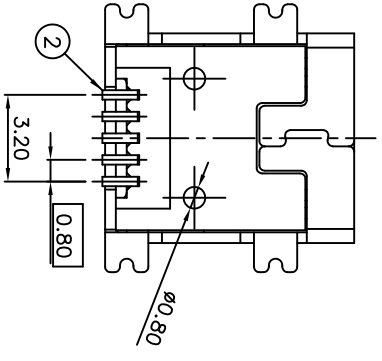
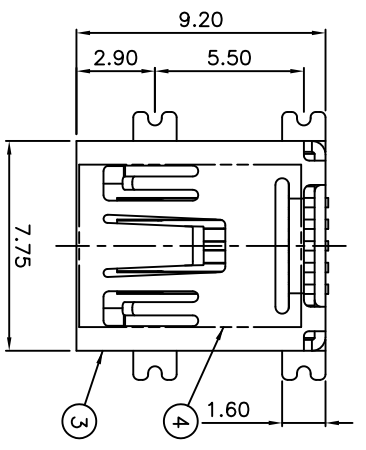


REV.	ECN NO.	LOCATIONS.	DESCRIPTION	DATE	CHANGER


- Materials :
- * Insulation: Glass filled Polyamide UL 94V-0
 - * Contacts: Copper Alloy
 - * Shell: Copper Alloy
 - * Shell Plating: 120μ" Tin plated over 30μ" Nickel
 - * Pick & Place Pad : Glass filled polyamide UL 94V-0

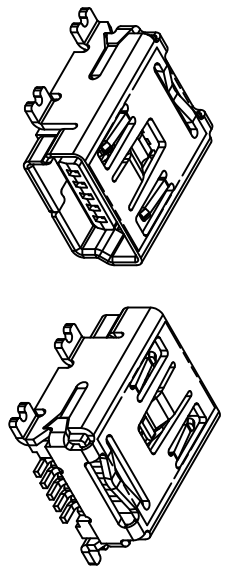


Ordering Code:

TMUB01X00-05 X X
 ① ② ③ ④ ⑤


- ① Series No.
- ② Plating code:
G= Selective 0.76um(30u") Gold plated
over 1.27um(50u") Nickel
- ③ No. of Contact:
- ④ Type: MB= Mini USB 5 Pin Type-B (Black)
AB= Mini USB 5 Pin Type-AB (Gray)
- ⑤ PACKING
A= Tape & Reel Packing (With Pick & Place Pad)



TYPE-AB
P/N: TMUB01G00-05ABA



TYPE-B
P/N: TMUB01G00-05MBA

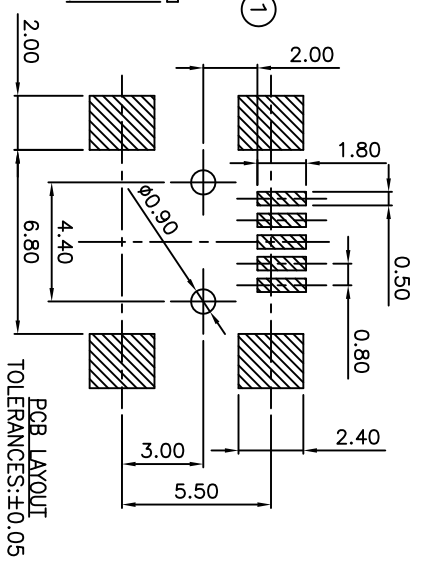

PCB LAYOUT
TOLERANCES: ±0.05

GENERAL TOLERANCE		X ± 1°		鉅創科技有限公司	
X ±	X ± 1°	TRONTEK TECHNOLOGY CO., LTD.			
X ± 0.30	X ±	TITLE: MINI USB 5PIN TYPE FEMALE SMT B. A-B TYPE			
X ± 0.20	X ±	PART NO: TMUB01X00-05XXX			
.XXX ± 0.10	XXX ±	DWG NO: 20120625			
CUSTOMER DRAWING		DRAWN: sunny		SCALE: 1:1	
APPROVED	CHECKED:	SHEET: 1/3		DATE: 20120625	
Paul	Paul	MM		REV: B	