


RECOMMENDED PCB LAYOUT

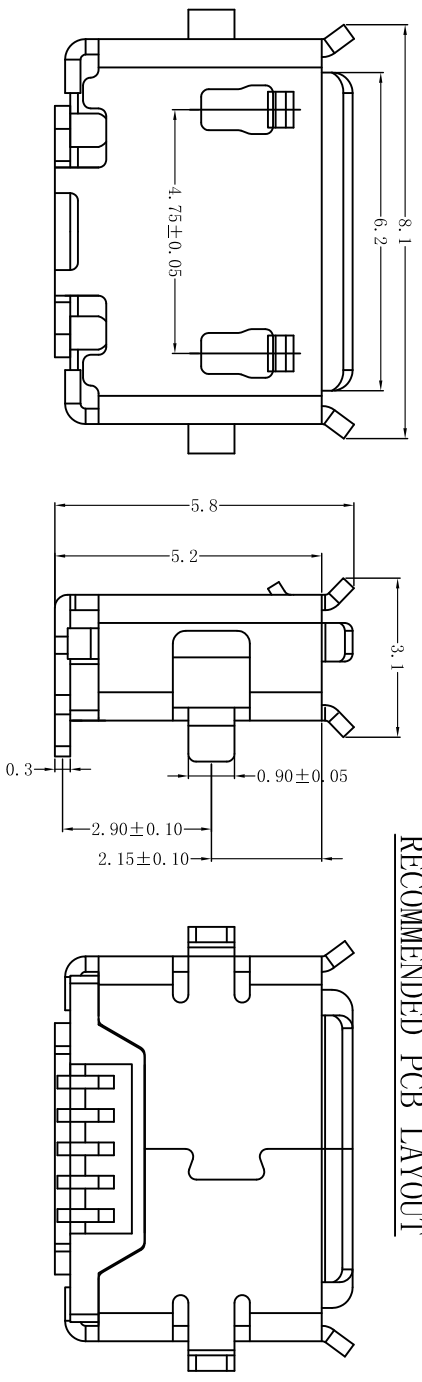

- 备注:
1. 产品规格:
    - 1-1. 插入力: 35N MAX.
    - 1-2. 拔出力: 10N MIN. INITIAL 8-20N AFTER 3000 CYCLES
    - 1-3. 额定电流: 1.0A
    - 1-4. 额定电压: 30V
    - 1-5. 耐久性: 3000 CYCLES MIN.
    - 1-6. 耐电压: 100V AC MIN.
    - 1-7. 接触阻抗: 30mΩ MAX. INITIAL: 40mΩ MAX AFTER 3000 CYCLES
    - 1-8. 绝缘电阻: 100MΩ MIN
    - 1-9. 工作温度: -30° TO +80°
  2. 材质:
    - 2.1 胶芯: LCP UL94V-0
    - 2.2 端子: C2680R-H, 镍底, 镀金 1μ"
    - 2.3 外壳: SUS
  3. 所用材质须符合RoHS要求
  4. 重点尺寸标识"▲"符号

鉸創科技有限公司  
TRONTEK TECHNOLOGY CO., LTD.

TOLERANCE: XX ±0.30 XXX ±0.25 X,XXX ±0.15		DRAWN BY : ANDY		DATE : 2016-2-24		PART NAME: MICO USB 5P AB#1# 8.35/4.45	
X' ±Z' X'X' ±0.5'		CHECKED BY: FRANK		DATE : 2016-2-24		PART NAME: TMAC106--USB005-835	
UNIT: mm [inch]		APPROVED BY: DAVID		DATE : 2016-2-24		DRAW NO: SHEET NO.	
SCALE: 1:1		SIZE: A4					