



底視圖

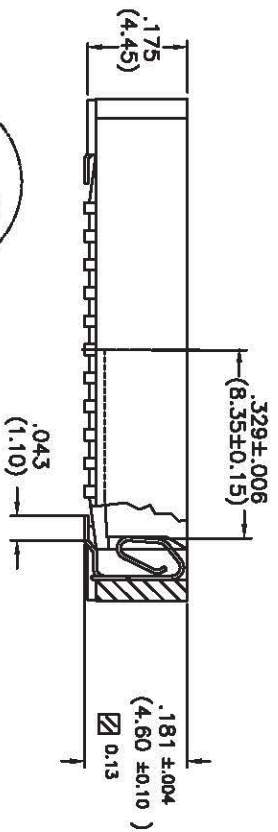

左右側公差3°

SPECIFICATIONS

INSULATION RESISTANCE:
1000 MEGOHMS MIN.
DIELECTRIC WITHSTAND STRENGTH:
500V (r.m.s) AC FOR 1 MINUTE.
CONTACT RESISTANCE:
30 mΩ MAX.
TEMPERATURE:
-55°C ~ +105°C.

MATERIALS AND FINISH

HOUSING MATERIAL:
POLYPHENYLENE SULFIDE
UL-94V-0.
CONTACTS:
PHOSPHOR BRONZE.
PLATING:
150u" MIN SN
50u" MIN NICKEL OVERALL.

PLCC-L-44P-3-X
1 2 3 4 5

TUBE PACKAGE
-R: WITHOUT POST,
TAPE&REEL PACKAGE.

UNLESS OTHERWISE SPECIFIED
DIMENSIONS TOLERANCE

INCH	METRIC
.00 ± .004	.0 ± .004
.000 ± .006	.00 ± .025
.0000 ± .003	.000 ± .076
ANG. ± .X°	ANG. ± .5°

單位 (UNITS)	mm
數量 (QTY)	N/A
材料 (MTR)	N/A
處理 (FINISH)	N/A

名 (NAME)	PLCC SMD TYPE
44 POS	

鉅創科技有限公司
TRONTEK TECHNOLOGY CO., LTD.

圖號 (DRAW)	繪圖 (DRAW)	設計 (DE'N)	審核 (CHK'K)	核准 (APP'D)	比例 (SCALE)	圖號 (DRAW NUMBER)	圖次 (REV)	圖次 (REV)	圖次 (REV)
黃月燕	陳文泳	陳文泳	陳文泳	葉善文	4:1	PLCC-L-44P-3-X	1 of 1		A

REV.	ECN NO.	DATE
A	RELEASED	10/02/08