
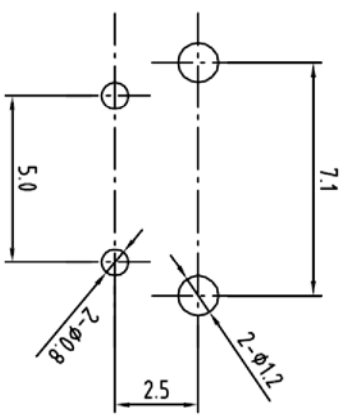
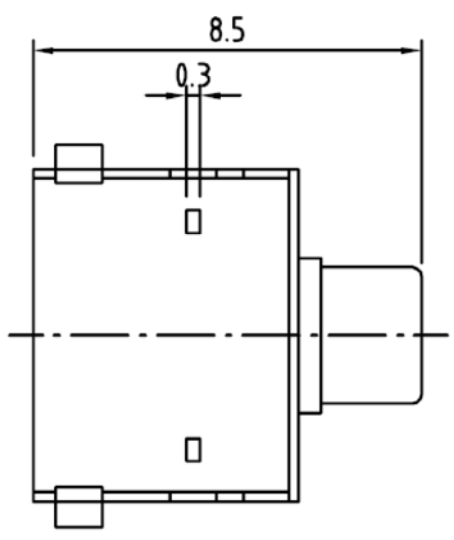
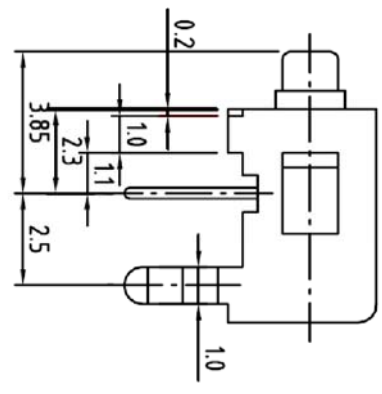


REV.	ECN NO.	LOCATIONS.	DESCRIPTION	DATE	CHANGER

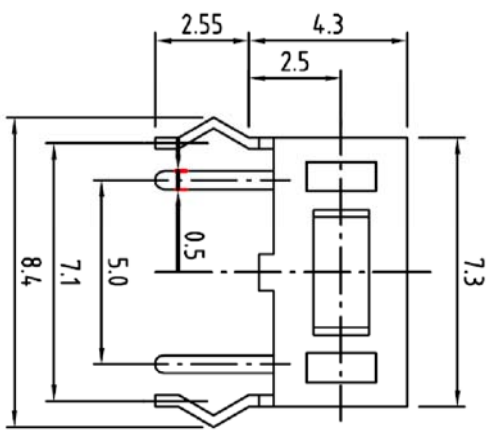

P.C.B LAYOUT

1. Rating : DC 12V. 50mA
2. Travel : 0.25±0.1mm
3. Operating Force : 180 ±30gf
or 250 ±50gf
4. Contact Resistance : 100m Ω MAX
5. Life : 50,000 or 30,000 Cycles
6. Generam Tolcerce:±0.2mm

ITEM	DESCRIPTION	Q'TY	MATERIALS	TREATMENT	REMARK
1	BASE	1	NYLON 66		
2	COVER	1	SPCC	NI plating	
3	STEM	1	NYLON 66		
4	TERMINAL	1	BRASS	Ag plating	
5	CONTACTOR	1	SUS301	Ag plating	

CIRCUIT DIAGRAM



GENERAL TOLERANCE		TITLE:	
X±	X± 1°	TACT SWITCH	
X± 0.15	X±	PART NO. RS6301VA	
XXX± 0.10	XX±	DRAWN: sunny	
.XXX± 0.05	.XXX±	M/M	
CUSTOMER DRAWING		DWG NO. 20130512	

APPROVED	CHECKED:	SCALE:	SHEET:
EVEN	EVEN	4:1	1 / 1
		PROJ:	REV:
			A

鉅創科技有限公司
TRONTEK TECHNOLOGY CO., LTD.