
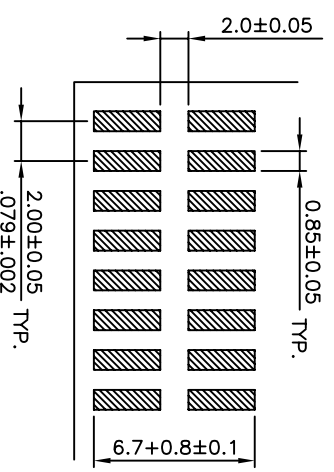


REV.	ECN NO.	LOCATIONS.	DESCRIPTION	DATE	CHANGER

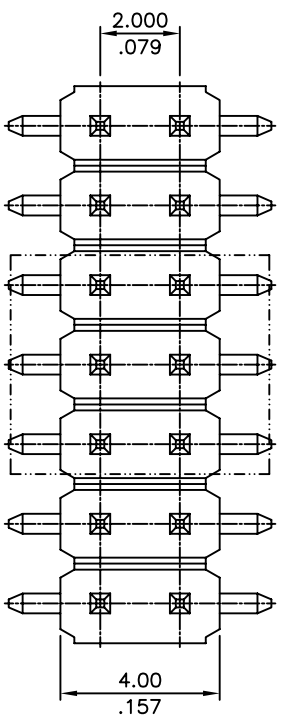

Recommended P.C. Boarded Layout



Material:  
 \* Insulator: Nylon 6T with 30% GF.  
 UL 94V-0 Color Black  
 \* Square Pin: Brass  
 \* Pick & Place Pad:  
 Nylon 6T  
 UL 94V-0 Color Nature

Ordering Code:

**P82P8X01 - X X 0 X**

- ① Series No.
- ② Plating code:  
 G=Gold Flash plated over  
 1.27 μm(50 μ") Nickel
- ③ No. of Contact: 04 to 80
- ④ OTHER OPTIONS:  
 0=STANDARD
- ⑤ C=Without Pick & Place Pad

A=With Pick & Place Pad  
 (Tape & Reel packing)

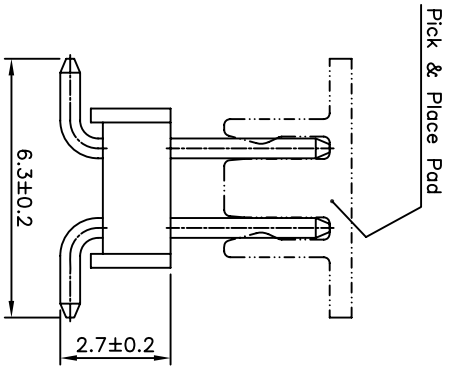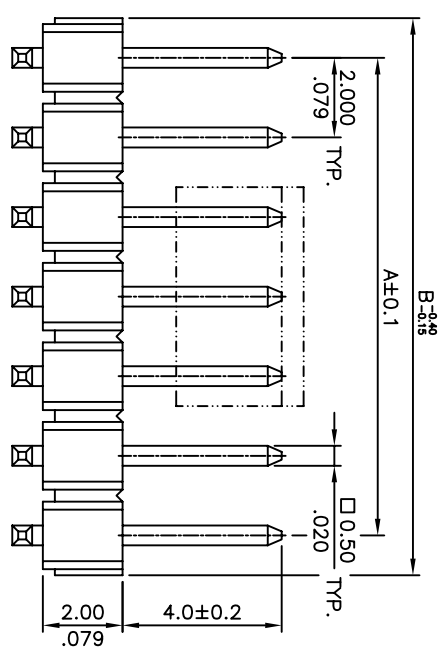

DIM. A = 2.00 X No. of Spaces  
 DIM. B = DIM. A + 2.00  
 \* Available in 4 through 80 Circuits

GENERAL TOLERANCE		TITLE:	
X ±	X ± 1°	PIN HEADER 2.0mm(.079") DUAL ROW H2mm SMT	
X ± 0.30	X ±	TRONTEK TECHNOLOGY CO., LTD.	
.XX ± 0.20	.XX ±	PART NO: P82P8X01-XXXX	
.XXX ± 0.10	.XXX ±	DWG NO: 20120512	
CUSTOMER DRAWING		SCALE: 1:1	
APPROVED	CHECKED:	DRAWN:	SHEET: 1 / 1
Paul	Paul	sunny	A

鐵創科技有限公司

TRONTEK TECHNOLOGY CO., LTD.

PIN HEADER 2.0mm(.079") DUAL ROW H2mm SMT

PART NO: P82P8X01-XXXX

APPROVED: Paul  
 CHECKED: Paul  
 DRAWN: sunny  
 SCALE: 1:1  
 SHEET: 1 / 1