


Pin No.	NAME	TYPE	DESCRIPTION
1	DAT 2	I/O/PP	Date Line (bit2)
2	CD/DAT 3	I/O/PP	Card Detect/Date Line (bit3)
3	CMD	PP	Command Response
4	VDD	S	Supply Voltage
5	CLK	I	Colock
6	VSS	S	Supply Voltage Ground
7	DAT0	I/O/PP	Date Line (bit0)
8	DAT1	I/O/PP	Date Line (bit1)

- NOTES:
- MATERIAL:
 - HOUSING: THERMOPLASTIC, UL94 V-0, COLOR: BLACK;
 - CONTACT: COPPER ALLOY T=0.15mm
 - SHIELDED: STAINLESS STEEL T=0.15mm
 - FINISH:
 - CONTACT: GOLD PLATING ON CONTACT AREA (SEE P/N DESCRIPTION) G/F or Sn 100u" MIN. PLATING ON SOLDER TAILS 50u" MIN. NICKEL UNDERPLATING OVER ALL
 - SHIELDED: NO PLATING
 - PRODUCT SPECIFICATIONS:
 - VOLTAGE RATING: 100V
 - CURRENT RATING: 0.5A
 - INSULATION RESISTANCE: 1000 MEG. OHM MIN
 - CONTACT RESISTANCE: 100 MILL. OHM MAX
 - OPERATION TEMPERATURE: -20° TO +85°
 - DURABILITY: 3000 CYCLES

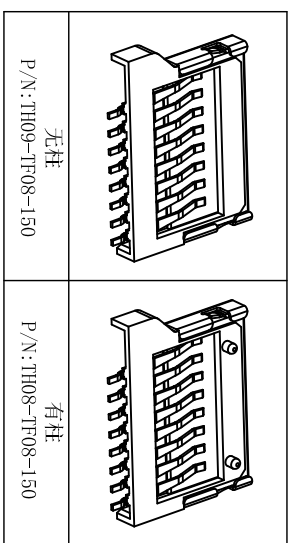

銳創科技有限公司
TRONTEK TECHNOLOGY CO., LTD.

TOLERANCE: XX ±0.30 XXX ±0.25 XXXX ±0.15 X' ±2" X.X' ±0.5"		DRAWN BY: FRANK		DATE: 2014.2.12		PART NAME: TF卡座 抽屜式1.5H	
CHECKED BY: RYAN		DATE: 2014.2.12		PART NO.		MOLD NO.	
APPROVED BY: LANDY		DATE: 2014.2.12		DRAW NO: TH08-TF08-150		SHEET NO. 10F1	

UNIT: mm [inch]
SCALE: 1:1 SIZE: A4