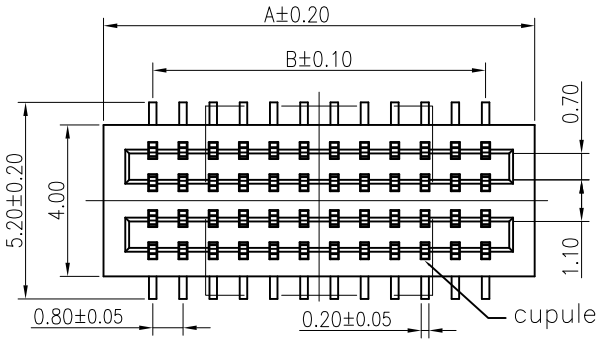

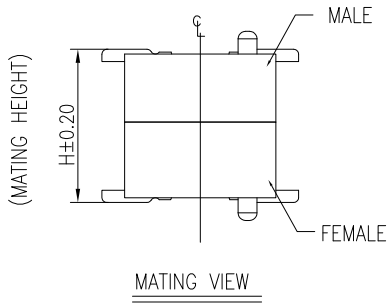

MATING VIEW

NOTES:

1.HUOSINGT: HIGH-TEMP THERMOPLASTIC UL94V-0 COLOR:BEIGE
2.TERMINAL:PHOSPHOR BRONZE
PLATING:1μ"GOLD FLASHOVERALL 50~100μ"NICKEL UNDER PLATED.
3.CODING INFORMATION: BB810-Gxx-2NRX

- MATING HEIGHT
  - A---3.0 height
  - B---3.5 height
  - C---4.0 height
  - D---4.5 height
  - E---5.0 height
  - F---5.5 height
  - G---6.0 height
  - H---6.5 height
- PACKING: E: TUBE, R: CARRIER REEL
- STANDARD TYPE
- PIN
- PLATING: G:GOLD FLASH
- 0.8 BOARD TO BOARD FEMALE WITH CUPULE TYPE
- MAXCONN BTB CONNECTOR SERIES

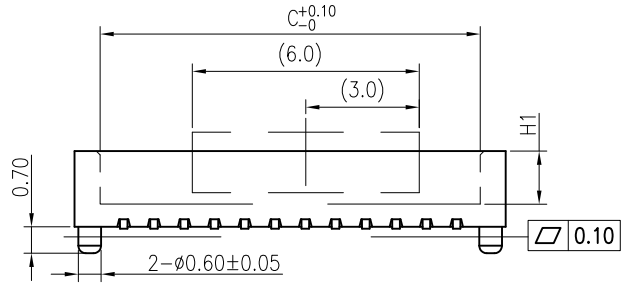



MATING HEIGHT	3.0	3.5	4.0	4.5	5.0	5.5	6.0	6.5
FEMALE H1	1.40				2.00			
FEMALE H2	2.05				3.45			
MALE H1	0.85	1.35	1.85	0.95	1.45	1.95	2.45	2.95

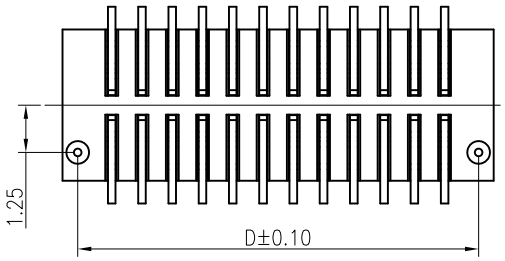

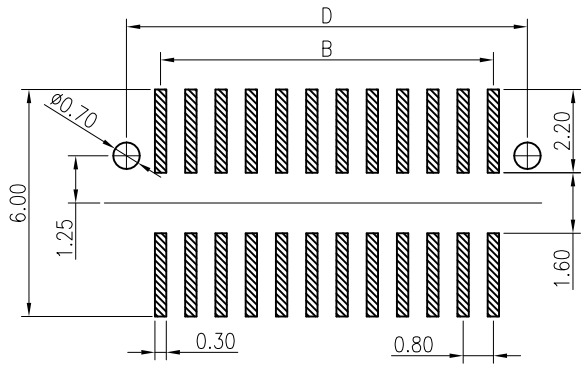

RECOMMENDED PCB PATTERN DIM.

TOLERANCE : ±0.05

PIN	Dimensions A	B	C	C	PIN	Dimensions A	B	C	C
8(2*4)	5.0	2.4	3.65	4.2	34(2*17)	15.4	12.8	#####	14.6
10(2*5)	5.8	3.2	4.45	5.0	36(2*18)	16.2	13.6	#####	15.4
12(2*6)	6.6	4.0	5.25	5.8	38(2*19)	17.0	14.4	#####	16.2
14(2*7)	7.4	4.8	6.05	6.6	40(2*20)	17.8	15.2	#####	17.0
16(2*8)	8.2	5.6	6.85	7.4	42(2*21)	18.6	16.0	#####	17.8
18(2*9)	9.0	6.4	7.65	8.2	44(2*22)	19.4	16.8	#####	18.6
20(2*10)	9.8	7.2	8.45	9.0	46(2*23)	20.2	17.6	#####	19.4
22(2*11)	10.6	8.0	9.25	9.8	48(2*24)	21.0	18.4	#####	20.2
24(2*12)	11.4	8.8	#####	10.6	50(2*25)	21.8	19.2	#####	21.0
26(2*13)	12.2	9.6	#####	11.4	52(2*26)	22.6	20.0	#####	21.8
28(2*14)	13.0	10.4	#####	12.2	54(2*27)	23.4	20.8	#####	22.6
30(2*15)	13.8	11.2	#####	13.0	56(2*28)	24.2	21.6	#####	23.4
32(2*16)	14.6	12.0	#####	13.8	58(2*29)	25.0	22.4	#####	24.2
34(2*17)	15.4	12.8	#####	14.6	60(2*30)	25.8	23.2	#####	25.0

SER	REVISIONS	CHK	DATE

CUSTOMER

鋐創科技有限公司
TRONTEK TECHNOLOGY CO.,LTD.

REV: A	SIZE: A4
UNIT: mm	SCALE: 5:1
SHEET NO: 1 OF 1	

GENERAL TOLERANCE UNLESS OTHERWISE SPECIFIED
X.X ±0.25
X.XX ±0.15
X.XXX
ANG. 0°30'

PART NO: BB810-Gxx-2NRX

TITLE: 0.8 BOARD TO BOARD SMT V/T TYPE FEMALE

DRAWN BY: Kavin 2014-08-12 | CHECKED BY: | APPROVED BY: