


RECOMMENDED P.C.B LAYOUT
TOLERANCES: ±0.05mm

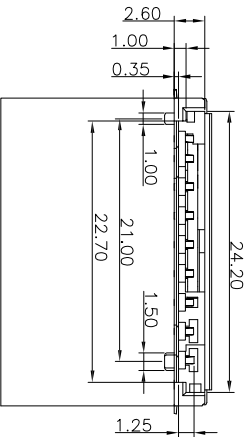

PIN#	NAME
1	CD/DAT3
2	CMD
3	VSS1
4	VDD
5	CLK
6	VSS2
7	DAT0
8	DAT1
9	DAT2

SPECIFICATION
MATERIAL
 Insulator: Thermal Plastic UL94V-0
 Contacts: Copper Alloy
 Boardlock: Copper Alloy
CONTACT PLATING
 Underplate: 50u"~100u" Nickel
 Contact Area: 1u"~30u" Selective Gold
 Solder Tails Area: 100u"~200u" Tin(Lead Free)
ELECTRICAL
 Current Rating: 1 Amps Max.
 Contact Resistance: 100mW Max.
 Insulation Resistance: 1000 MW Min./500 VDC
MECHANICAL
 Mating Cycles: 10000 Cycles
 Temperature Range: -25°C To +85°C

鉞創科技有限公司 TRONTREK TECHNOLOGY CO., LTD.		PART NAME: SD長卡	
DRAWN BY : SANDY CHECKED BY : DAVTD APPROVED BY : FRANK	DATE : 2014-3-15 DATE : 2014-3-15 DATE : 2014-3-15	PART NO. : T1123-S011-250 MOLD NO. : DRAW NO. : SHEET NO. : 10F1	DATE : DATE : DATE :
TOLERANCE: XX ±0.30 XXX ±0.25 XXXX ±0.15 X: ±2 UNIT: mm [Inch] SCALE:1:1 SIZE: A4	RECOMMENDED P.C.B LAYOUT TOLERANCES: ±0.05mm		