
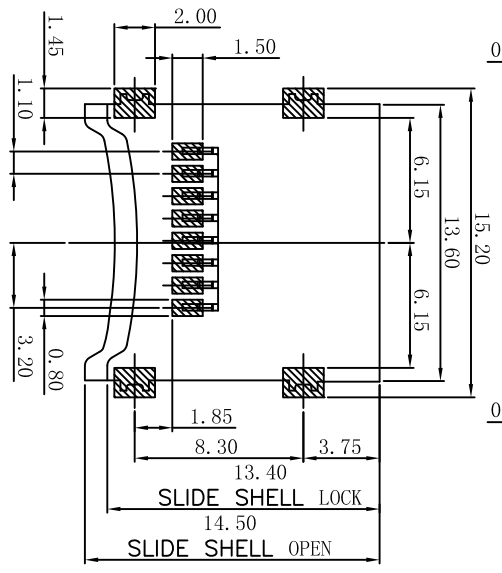



SLIDE SHELL OPEN

SLIDE SHELL LOCK

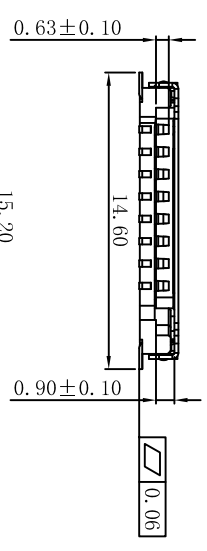

RECOMMEND PCB LAYOUT
TOLERANCE: ±0.05
TOP VIEW

PART NO.	H=?
TH40-TF08-150	1.5
TH39-TF08-180	1.8



PIN5	CLK		
PIN4	VDD		
PIN3	CMD		
PIN2	CD/DAT3		
PIN1	DAT2		
PIN NO.			

- MATERIALS**
- HOUSING : THERMOPLASTIC LCP S475-30%GF, U194 V-0.
 - TERMINAL : COPPER ALLOY, C5191R-EH, T=0.15mm.
PLATING : 3μ" AU PLATED ON CONTACT AREA.
800"~1200" PLATED ON SOLDER TAILS.
500"~800" NICKEL PLATED OVERALL.
 - SHELL : SUS304-1/2H, T=0.20mm.
 - SOLDER : C5191R-EH, T=0.15mm.
PLATING : 800"~1200" PLATED ON SOLDER TAILS,
500"~800" NICKEL PLATED OVERALL.

SPECIFICATION

- CURRENT RATING : 0.5 A. MAX.
- VOLTAGE RATING : 5V.
- DIELECTRIC WITHSTANDING VOLTAGE :
250V AC R.M.S. FOR 1 MINUTE.
- INSULATION RESISTANCE : 500MΩ MIN. AT 5V DC.
- CONTACT RESISTANCE : 100mΩ MAX.
- OPERATING TEMPERATURE : -20° C TO +85° C.
- DURABILITY : 5000 CYCLES.

Bill of Materials:

No.	TITLE	MATERIAL	FINISH(OR COLOR)	QTY
1	HOUSING	LCP S475-30%GF, U194 V-0	黑色	1
2	SHELL	SUS 304-1/2H	清洗除油(不电镀)	1
3	TERMINAL	C5191R-EH	接触点镀金3μ",焊脚镀锡800"~1200"	1SET
4	SOLDER	C5191R-EH	锡锡 800"~1200"	1SET

DESCRIPTION OF PLATING ON TERMINALS	
NO.	EXPLAIN
0	GOLD FLASH
1	GOLD 5μ"
2	GOLD 10μ"
3	GOLD 15μ"
4	GOLD 20μ"
6	GOLD 30μ"

銳創科技有限公司
TRONTEK TECHNOLOGY CO., LTD.

TOLERANCE: XX ±0.30 XXX ±0.25 XXXX ±0.15 X' ±2' X" ±0.5'	DRAWN BY : SANDY	DATE : 2015-8-16	PART NAME: TF 掀蓋
UNIT: mm [Inch]	CHECKED BY : TONY	DATE : 2015-8-16	PART NO.: TH39(40)-TF08-XXX
SCALE: 1:1	APPROVED BY : DAVID	DATE : 2015-8-16	MOLD NO.:
SIZE: A4			DRAW NO.:
			SHEET NO.: 10F1