
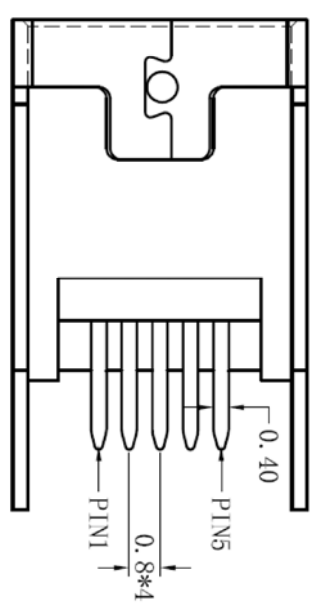
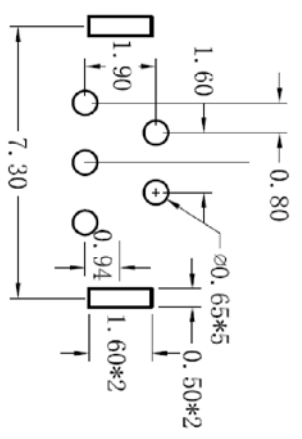
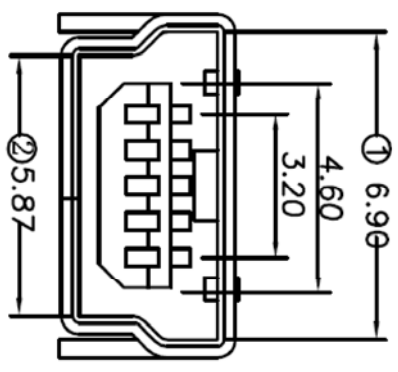
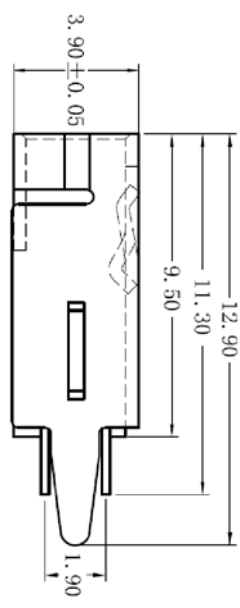


REV.	ECN NO.	LOCATIONS	DESCRIPTION	DATE	CHANGER

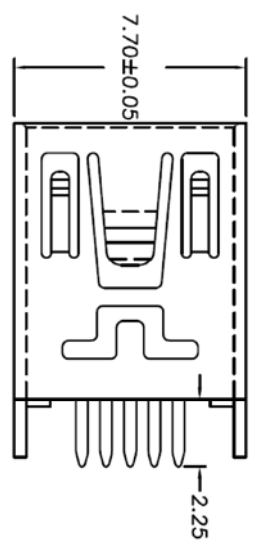

规格说明: Specifications:
电气特性: Electrical:

1. 额定电流: Current Rating
1.0A/contact terminal
2. 额定电压: Voltage Rating
30V DC

3. 接触阻抗: Contact Resistance
50 milliohms MAX
4. 耐电压: Dielectric Withstanding Voltage:
300 V AC AT Sea Level

5. 绝缘阻抗: Insulation Resistance:
100MEGA ohms MIN

物理性能: Mechanical:

1. 插拔力: Connector Mate and Umate Force
Mate force: 3.0kgf (MAX)
Umate force: 0.7kgf (MIN)
2. 端子保持力: Terminal Retention
0.5kgf (MIN)

原材料: Material:

1. 塑胶: Housing:
Hing Temperature Thermoplastics,
UN 94V-0 LCP black
2. 端子: Contact: Copper Alloy C2680/C5191
3. 外壳: Shell: Copper Alloy C2680

电镀: Finish:

1. 端子: Contact: Plated Gold in Mating Area;
Tin On Solder Tails
2. 外壳: Shell:
Nickel Plating

RECOMMENDED PCB LAYOUT

GENERAL TOLERANCE		鉸創科技有限公司 TRONTEK TECHNOLOGY CO., LTD.	
X± 0.25	X± 2°	PART ID: TMU-02-B-04-N01 DWG NO: 20120713	
X± 0.20	X± 1°		
.XX± 0.15	XX±		
XXX± 0.05	XXX±		
CUSTOMER DRAWING		TITLE: MINI USB 5P/ 180D B型直尖腳	

APPROVED	CHECKED:	DRAWN:	SCALE:	SHEET:
Paul	Paul	sunny	1:1	1 / 1
			mm	B