
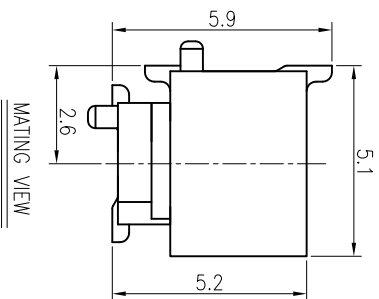

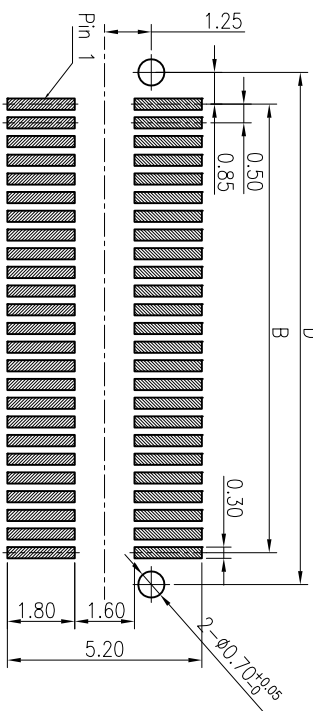
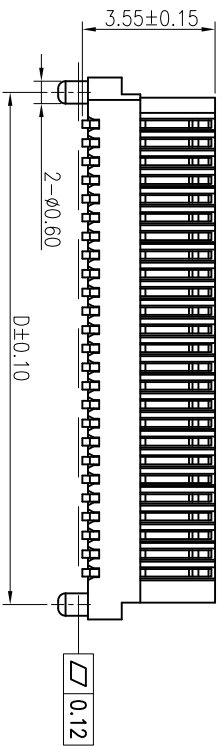
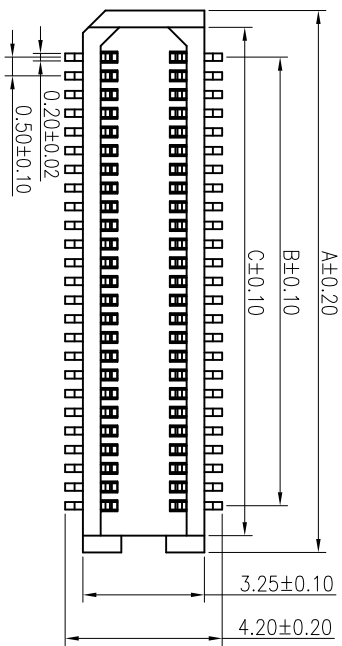


NOTES:

1. HUSING: I: PA6T HIGH-TEMP THERMOPLASTIC UL94V-0 COLOR: WHITE
2. TERMINAL: PHOSPHOR BRONZE C5191  
PLATING: 1.μ" GOLD FLASH OVERALL 50~100μ" NICKEL UNDER PLATED.
3. CODING INFORMATION: BB400-Gxx-1AR

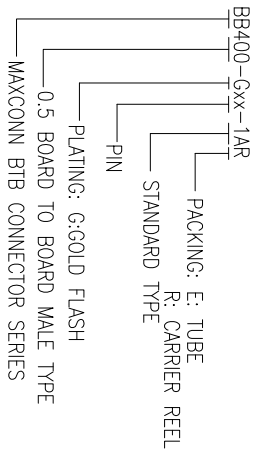

No. of contacts	Dimensions				No. of contacts	Dimensions			
	A	B	C	D		A	B	C	D
2*4	4.0	1.5	3.1	3.2	2*17	10.5	8.0	9.6	9.7
2*5	4.5	2.0	3.6	3.7	2*18	11.0	8.5	10.1	10.2
2*6	5.0	2.5	4.1	4.2	2*19	11.5	9.0	10.6	10.7
2*7	5.5	3.0	4.6	4.7	2*20	12.0	9.5	11.1	11.2
2*8	6.0	3.5	5.1	5.2	2*21	12.5	10.0	11.6	11.7
2*9	6.5	4.0	5.6	5.7	2*22	13.0	10.5	12.1	12.2
2*10	7.0	4.5	6.1	6.2	2*23	13.5	11.0	12.6	12.7
2*11	7.5	5.0	6.6	6.7	2*24	14.0	11.5	13.1	13.2
2*12	8.0	5.5	7.1	7.2	2*25	14.5	12.0	13.6	13.7
2*13	8.5	6.0	7.6	7.7	2*26	15.0	12.5	14.1	14.2
2*14	9.0	6.5	8.1	8.2	2*27	15.5	13.0	14.6	14.7
2*15	9.5	7.0	8.6	8.7	2*28	16.0	13.5	15.1	15.2
2*16	10.0	7.5	9.1	9.2	2*29	16.5	14.0	15.6	15.7
2*17	10.5	8.0	9.6	9.7	2*30	17.0	14.5	16.1	16.2

鉸創科技有限公司  
TRONTEK TECHNOLOGY CO., LTD.

RECOMMENDED PCB PATTERN DIM.

TOLERANCE : ±0.05

REV:	SIZE:	GENERAL TOLERANCE	PART NO.:
A	A4	UNLESS OTHERWISE SPECIFIED	BB400-Gxx-1AR
UNIT:	SCALE:	X.X ±0.25	TITLE:
MM	5:1	XXX ±0.15	0.5 BOARD TO BOARD
SHEET NO.:	ANG:	XXX	SWT V/T TYPE MALE
1 OF 1	0°30'		
DRAWN BY:	CHECKED BY:	APPROVED BY:	
Kaoru	2012-12-03		

SER	REVISONS	CHK	DATE